



TTV-5565
in 55cm mode

Walk behind often better...

The walk behind Vario is a machine that has been designed to provide outstanding performance in areas and applications where bigger machines are just not practical.

Just think of supermarkets for example, long aisles, numerous obstructions, plenty of turning and tight corners.

Hospitals with their long, long corridors, one minute you are in big, yet congested spaces, the next minute, narrow walkways.


Car showrooms are another classic where good manoeuvrability is totally essential.

Full and careful consideration must always be given at the onset as one fact will always ring true:-

Get the specification right at the beginning and you will achieve the correct results at the end.

Vario TTV-55/65: The Answer is in your own Hands

TTV5565

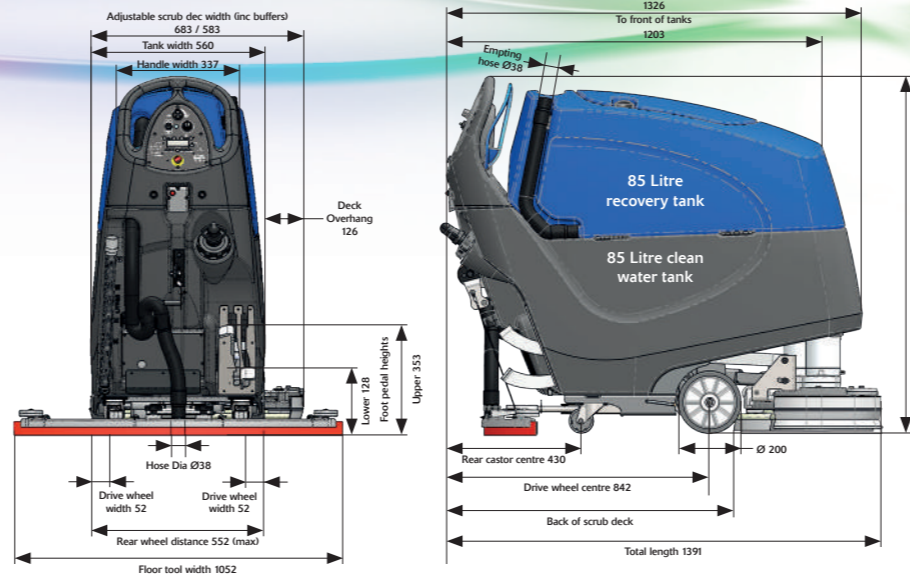

Brush motor	Vac motor	Power	Run time	Traction drive	Drive speed	Cleaning speed	Climbing gradient	Scrub widths
2x400W	600W	4 x 12V (24V) = 200Ahr	3.5 Hrs	480W	4.2km/h	4.2km/h	9%	550mm 650mm

Brush speed	Water capacity	Nuchem capacity	Water flow rate	Nuchem mix	Gross weight (full)	Dimensions (HxLxW)
200rpm	85L	Optional 5L	3L/min 2L/min 1L/min .5L/min	25:1 50:1 75:1 100:1	287kgs	1142x1391x1052mm



www.numatic.co.uk
www.numatic.fr

www.numatic.de
www.numatic.nl

www.numatic.ch
www.numatic.co.za

Numatic International Limited, Chard, Somerset, TA20 2GB Tel: 01460 68600 Fax: 01460 68458
Numatic International Limited 2012. Specification subject to change without prior notice. PN 233906/0713



TTV5565

The TwinTec Vario 55/65 represents, in every way, the optimum walk behind traction auto-scrubber with a range of advanced, yet practical, features that truly allow us to claim... "Best in Class".

This TwinTec gets its Vario name from the fact that this one machine can, by a no tools adjustment and simple brush change, be set to operate at either a 55cm or 65cm scrubbing width... Two Machine Choices in One.

In the 65cm mode the scrubbing head is automatically expanded to a practical offset operating mode, providing a 100mm head extension to the right hand side. This simple arrangement allows improved edge cleaning especially in aisles with racking or other obstructions.

In normal operation the machine delivers a constant 40Kg of brush pressure but to this we have added a heavy duty spot cleaning feature, allowing the operator to select a 50Kg override setting at any time should it be required.

Add to the exceptional cleaning performance, low noise and excellent manoeuvrability and you have a machine designed to deliver satisfaction on all counts.



Best in class

The operator controls are a separate feature in their own right with independent selection of speed, water flow and chemical dosing all built in to the basic unit, all of which can be set to provide total convenience and consistency of operation.

Beneath the hinged dirty water tank sits the operating heart of the Vario with its 200Ahr gel battery and charging system, high performance suction unit and NuChem dosing facility... all easily accessible.



The unique Twintec 55cm/65cm dual brush system...

A simple, no tool adjustment and brush change allows a selection of either 55cm or 65cm scrubbing widths.

